



Closure Box [ONT]

Indoor Termination - 2 Ports Face Plate Box SC Adaptors

The *LightMax*[®] HO2SC02 box has been developed for FTTH and wall mounting applications. It has a maximum capacity of up to 2 fibres and is mounted with SC adaptors.

Features

- Reduced weight and dimensions.
- Indoor rated.
- Max. capacity: 2 Fibres.
- Made of ABS.
- Easy use and installation.
- 2 (or 1) drop ports.

Applications

- End termination of residential buildings.

SPECIFICATIONS

Max. capacity	—	2 Fibres
Colour	—	White
Material	—	ABS
Dimensions	mm	86 x 86 x 24
Installation Size	mm	150 x 110
Nominal weight	kg	0.06
Splice trays count	—	N/A
Suitable cable	—	Ø8 ~ Ø10 mm Indoor 2, 3, 3 x 2 Soft drop
Temperature	°C	-40 ~ 75
Protection grade	—	IP30
Wiring method	—	Mechanical splice + Pigtail
Adaptors	—	SC APC Simplex
Sealing method	—	N/A
Standards	—	RoHS 3

Part Number

LM-HO2SC02


Rel. 3-EN/JUL22



[Pictures for reference purposes only]

LM-HO2SC02 inner details

- Structural Drawing

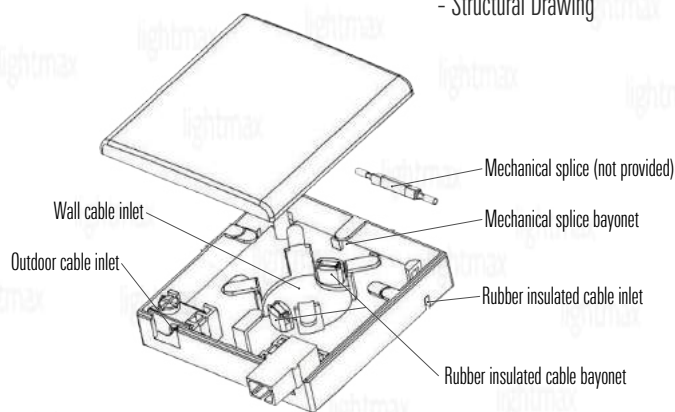

- Application detail

