



Closure Box [ODB]

Indoor/Outdoor Distribution - IP66

8 drop ports

SC Simplex | LC Duplex

The *LightMax*® H0208EX fibre optic distribution box can be used on FTTH termination points of the service cables. It can hold up to 8 splices and serve up to 8 subscribers.

Features

- Waterproof design - IP66 rating.
- Indoor and outdoor.
- Max. capacity 8 splices.
- Holds service and drop cables.
- Made of ABS, UV resistant.
- Watertight cover with locking screw.
- Plenty of space inside to accommodate service and drop cables, pigtails and adapters.
- Suitable for indoor or outdoor wall mounting or pole mounting.
- RoHS.

Application

- End termination of residential buildings and villas.




[Pictures for reference purposes only]




SPECIFICATIONS		
Max. capacity	—	8 splices
Colour	—	Light grey
Material	—	ABS
Dimensions	mm	215 x 205 x 55
Installation Size	mm	145 x 120
Nominal weight	g	600
Splice trays count	—	1
Cable diameter range	mm	3.0 x 2.0 drop o cable interior
Temperature	°C	-40 ~ 60
Ingress Protection	—	IP 66
Cable ports	—	1 inlet 6 bajada (drop)
Adapters	—	SC simplex
Sealing method	—	Mechanical


LM-HO208EX - interior details

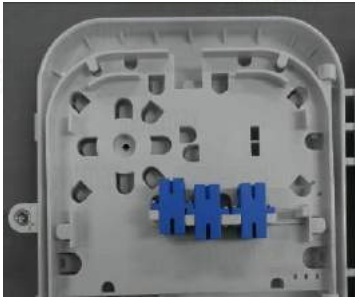


With SC Simplex adapters installed

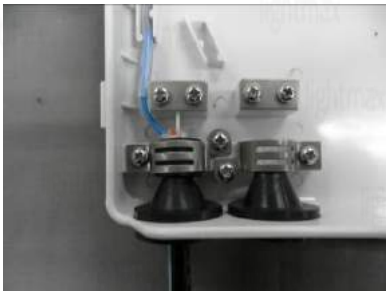


Feeder cable fixation clamps

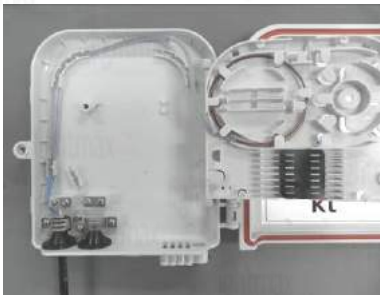


Fibres of the service cable inserted in the protective tuber

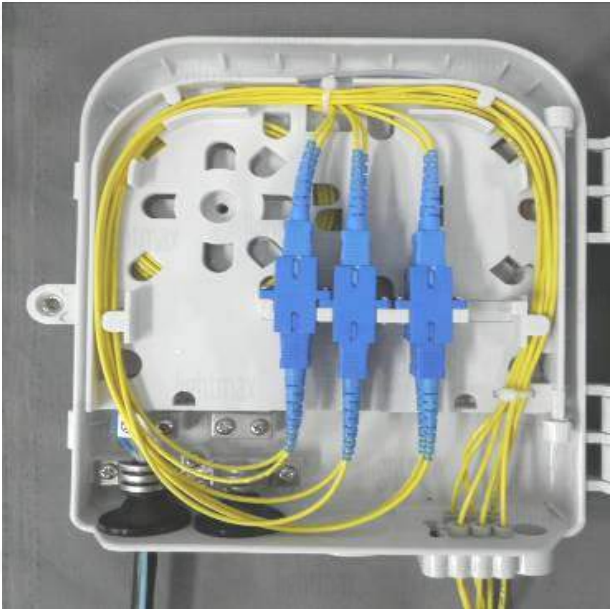

Overall view

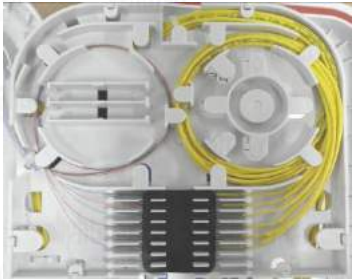

Fusion (or mechanical) splices in the tray

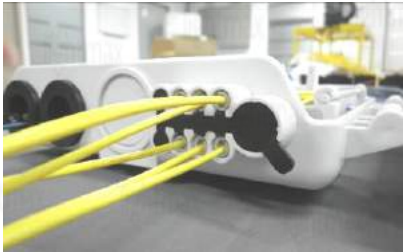

Drop cables

Images for reference purposes only

Part Number

LM-HO208EX

Rel. 3-EN/AUG22

Lightmax S.L. reserves the right to change the characteristics in this document without prior notice. This document is property of Lightmax S.L. Redistribution is not allowed without consent of Lightmax S.L.